


## Proper Positioning of the Mechanical Computer Reset Mechanism

The purpose of this bulletin is to assist the technician when installing a mechanical computer that uses an electric reset. The following illustrations show the approximate location of the computer "shift cam" that is required when attaching the electric reset linkage.

If the position of the shift cam is significantly "off" relative to the reset linkage, the wheels will reset but when fuel is dispensed the wheels will not turn or will turn erratically.

### Tokheim®

The shift cam should be positioned so that the line on the cam is pointing upward.

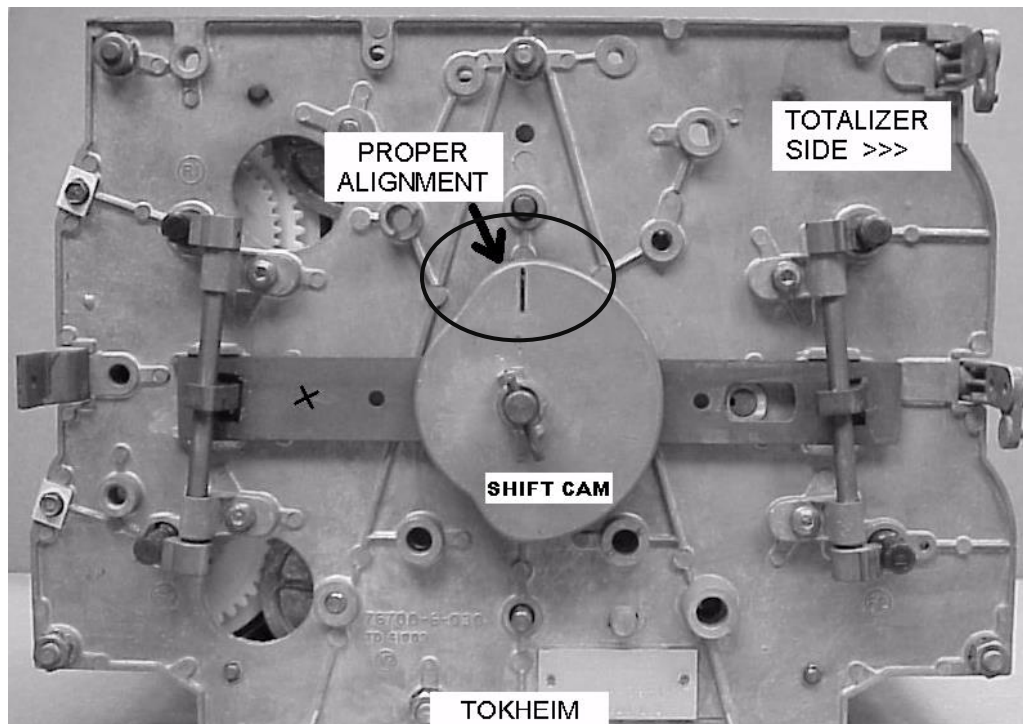

See the following pages for Gilbarco® (Southwest®) and Veeder-Root® (for Bennett®, Wayne®, Smith®) type reset computers.

All product or company's names, trade names, trademarks, parts numbers and part descriptions may be the trademarks of their respective owners, and are used for reference or identification purposes only. PMP does not claim any right to or affiliation with such owners. The PMP product described here is manufactured or remanufactured and sold by PMP and is not the product of any other identified manufacturer.



**PMP CORPORATION**  
P.O. Box 422 • 25 Security Drive  
Avon, CT 06001

*A Veteran Owned and Managed Company*


Local: 860-677-9656  
Toll Free: 800-243-6628  
Toll Free Fax: 888-674-0196  
Web: [www.pmp-corp.com](http://www.pmp-corp.com)  
E-mail: [sales@pmp-corp.com](mailto:sales@pmp-corp.com)



© PMP CORP


## Veeder-Root® for Bennett®, Wayne® and Smith®

The shift cam should be positioned so that the two holes in the shift cam are closest to the "X" stamped on the slide bar.

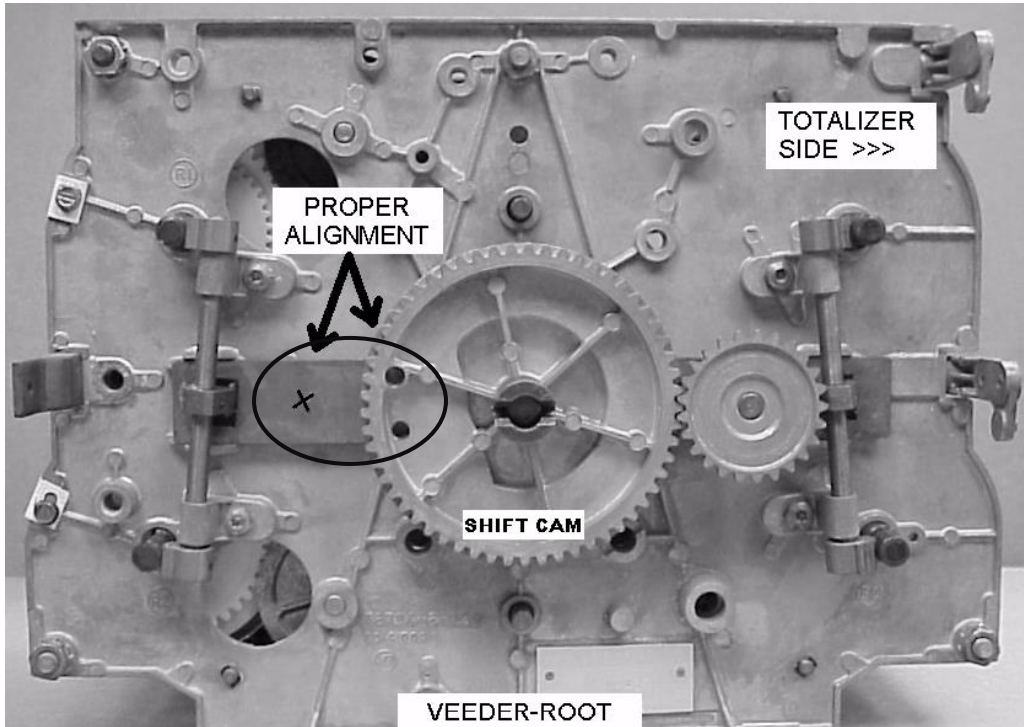

### **Applies to all Computer-Mounted V-R Electric Resets**

Make sure that the reset "Drive Coupling" (the round metal piece in the middle photo below) is oriented exactly as shown below after the reset has completed its cycle. If this drive coupling is installed 180° out of position, the computer will not reset correctly. If incorrect, remove the retaining clip and remove and rotate the coupling 180°, reinstall clip.

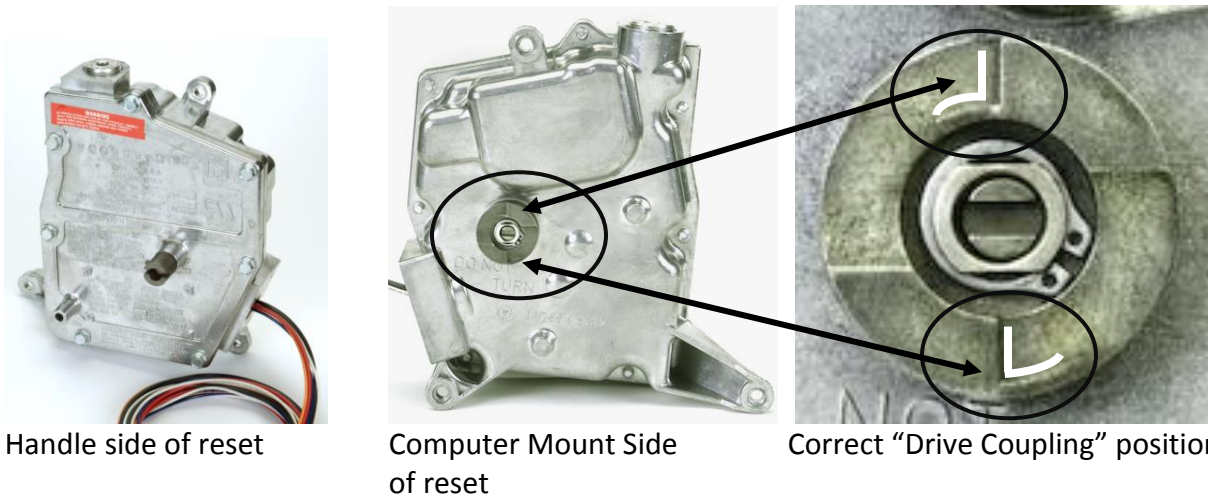

Handle side of reset


Computer Mount Side of reset

Correct "Drive Coupling" position



## Gilbarco® & Southwest®

The shift cam should be positioned so that the two holes in the shift cam are closest to the "X" stamped on the slide bar.

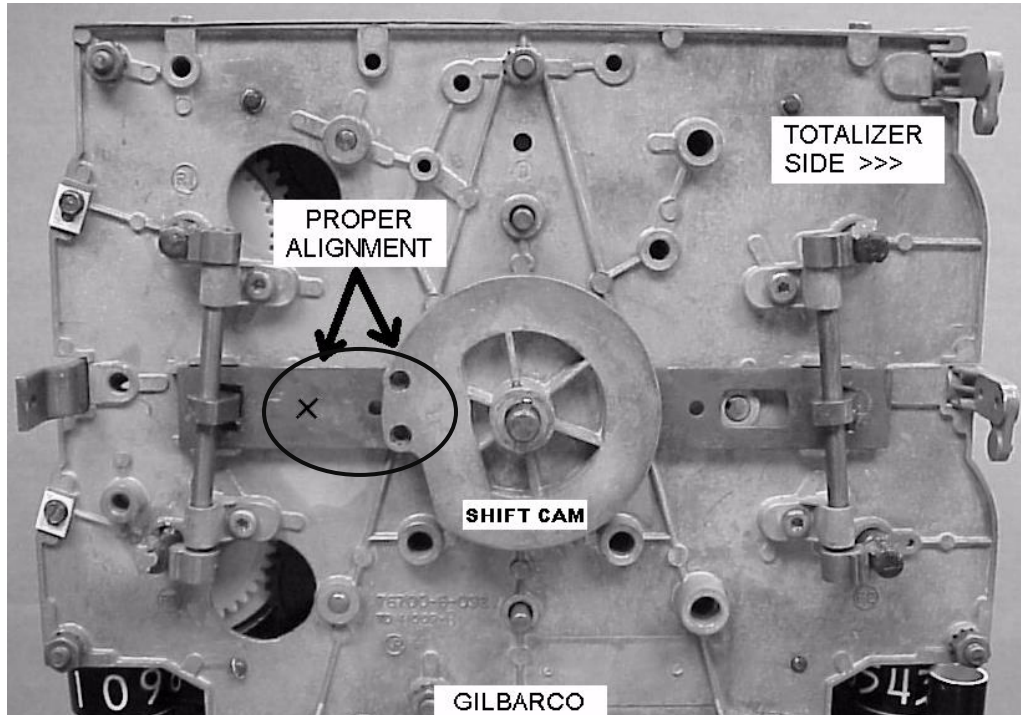

All product or company's names, trade names, trademarks, parts numbers and part descriptions may be the trademarks of their respective owners, and are used for reference or identification purposes only. PMP does not claim any right to or affiliation with such owners. The PMP product described here is manufactured or remanufactured and sold by PMP and is not the product of any other identified manufacturer.



**PMP CORPORATION**  
P.O. Box 422 • 25 Security Drive  
Avon, CT 06001

*A Veteran Owned and Managed Company*

Local: 860-677-9656  
Toll Free: 800-243-6628  
Toll Free Fax: 888-674-0196  
Web: [www.pmp-corp.com](http://www.pmp-corp.com)  
E-mail: [sales@pmp-corp.com](mailto:sales@pmp-corp.com)



© PMP CORP